□□□□□:

□□□□:	[□□□ straisghtening □□□□ F601HF]()
□□□□:	□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
MOQ:	1-100□000pcs
□□□□□□□□□□□	60 □□□□□□□□□ □□□□□□□□□□□□□□□□□
□□□□□□□□□□□:	□□□□□□□□□□□□□□
□□□:	□□□□□□□□□□□□□□□□□□□
□□□□□□□:	□□□□□□□
□□□□:	50 us □□ 200 □□□
□□□□□□□□□□□	□□□□□□□□□□□□□□□□ □□□□□□□
□□□□:	T □ T□L/C□Paypal□□□□□□□ □ □□□□
□□□□□□□□:	ISO9001
□□□□:	PTC 2 □□□1 □□□□□

F601HF □□□□□:

□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□ □□

□□□□□□□□□□□□□□□□□□□□□□:

FBT □□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□. □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

F601HF [illegible] [illegible]:

[illegible] [illegible] [illegible]
[illegible] [illegible] [illegible] 1[illegible]000pcs [illegible] [illegible]

F601HF [illegible] [illegible]

* [illegible]
* [illegible] [illegible] [illegible] [illegible]
* [illegible] 230 C[illegible]
* 9 [illegible] 360 ° [illegible]
* [illegible] PTC [illegible]; [illegible]
* [illegible] 110 v [illegible] 220 v[illegible]; [illegible]
* 60 [illegible]dafely [illegible]

[illegible]:

□□□ing □□□:	* □□□ □□□□□□ * GB □□□□: 10.5 * 30 * 5.4 cm 20 pcs/□□□ * □□□□□□□□: 56.8 * 38.5 * 24 cm * G.W.:15.50KG * □□: 8.40KG * 1 * 20GP:10999pc * 1 * 40GP: 21079pcs
□□□□:	□□ DHl□□□□□□□□TNT□UPS□seashipment

□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□

□□□□□□□□□□

1□ □□

□□□□□□□□□□□□□□□□□□□□ 1 □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

2□ □□ □□ □□□□ 1 □□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□ □□□ □□□□□□□□□□□□□□□□□□□□□□□□□□

3. □□

4. □□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

1. □□□□□□□□□□□□□□□□□□□□□ 1 □□

2. □□

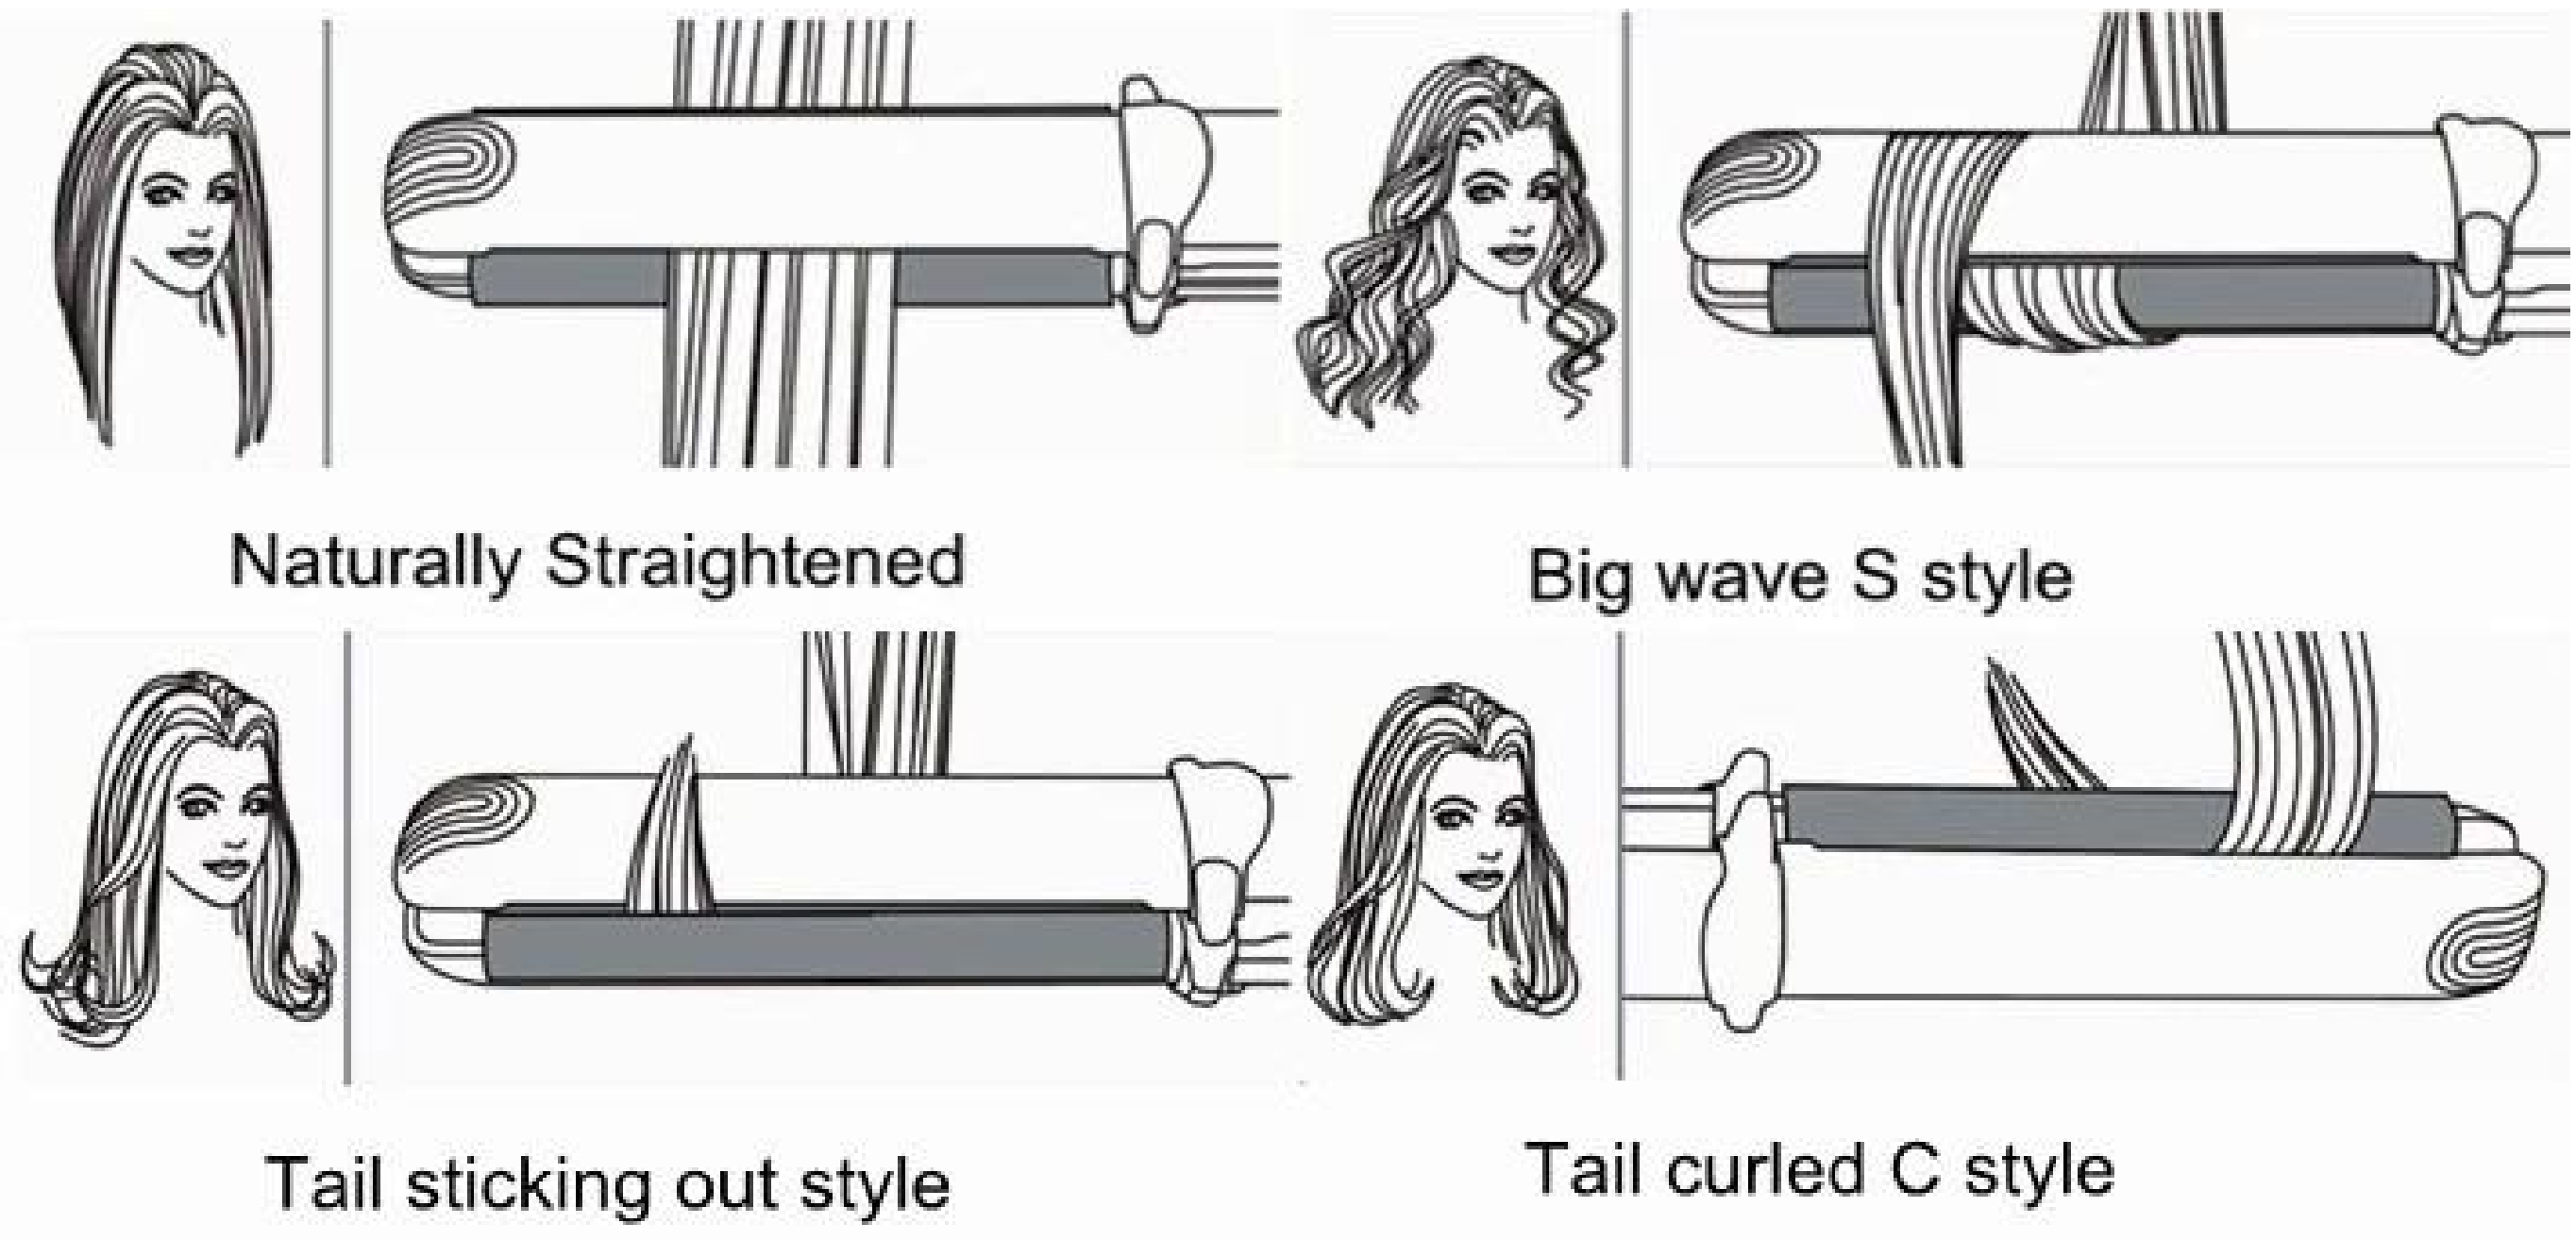

□□□□□□□□□□□□□□□□□□

F178C FBT □□□□□□□□□□□□□□□□□ PTC □□□□□□□□□□□□□□□□□□□, □□□□□□□□□□ □ 20 mm □□□□PTC □□□□□□□□□□□□□□□□ □□□□□□ 5 □□□□□□□□□□□□□□□□□□□□□□□□□ ON/OFF □□□□ □□□□□□□ 2.65 m □□□□□□□□□□

Injection black shell
Swivel power cord
5 digital temperature settings
Titanium plate
Plate size: 110mm*20mm